

MAILCRAFTERS

L LETTERSHOP

B BASIC

I INSERTER

BASIC SIMPLICITY IN A RUGGED INSERTER

THE NAME SAYS IT ALL

The **LBI** processes envelopes with ease, eliminating complexities often associated with other inserters. The ability to run the toughest jobs is made easy using PLC logic with basic switch controls. With the PLC being at the heart of this machine, speed and accuracy are assured while operator performance is enhanced. The industry's standard for "in-arm" detection is integrated as a standard feature. The smooth, durable operation of the **LBI** unitized drive system allows this swing arm inserter to last for years running at optimum speeds.

The **LBI** is offered in 6 or 12 stations of collation with Stacker or Mounted Turnover sealed envelope delivery.

The low price, ease of operation and the low maintenance cost make the **LBI** an excellent cost effective choice.



SWITCH STYLE
INTERFACE



MOUNTED TURNOVER
CONFIGURATION



MODEL FEATURES

- Positive Vacuum Insert Selection
- Sequential Start-Up / Shut Down
- Unitized Drive
- "Whisper" Vacuum Pump
- Switch and PLC Control
- Two Hand "Safety" Start

SIMPLY THE BEST

The **LBI** collates your inserts, inserts them into an envelope, seals and delivers them to a postage meter or stacks them for the operator to process. Based on swing arm technology this inserter is one of the most flexible Inserters on the market. This technology allows the inserter the ability to run different sizes of material with minimal setup.

Setup of the “miss/double detection” system is easy and helps provide envelope/insert integrity. This feature also helps minimize down time between jobs and stoppages for false detections.



Designed for letter shops and mailrooms, this inserter has a rugged base and drive system making it reliable, long lasting and well known in the industry for it’s low maintenance cost.

LBI SPECIFICATIONS

- Available in 6 or 12 stations
- Insert Size: 6” X 9” maximum
2 3/4” X 3 1/2” minimum
- Insert Thickness: 1/8” maximum out of each station
1/ 4” maximum overall thickness in envelope
- Envelope Size: 6 1/2” X 9 1/2” maximum
3 1/2” X 6 1/2” minimum
- Envelope Flap: 2 3/8” maximum
3/4” minimum
- Power 210 – 240VAC at 30 amperes

OPTIONAL

- Open Feed Station
- Friction Feeder
- End Fold
- Density Checker
- 8 ft. Conveyor
- System connections
- Modem Link (Phone Support)
- Inline Inkjet

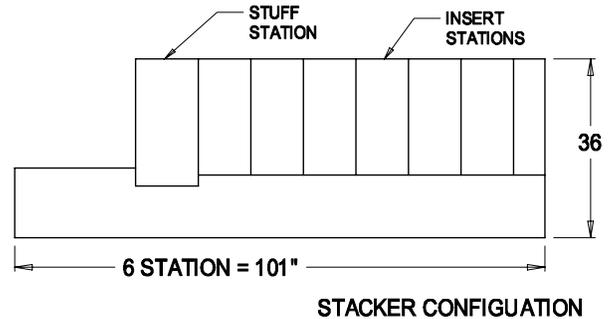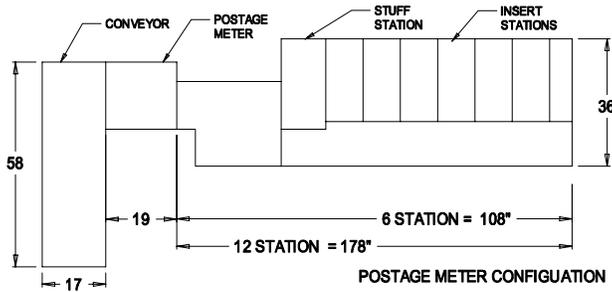

MAILCRAFTERS

Product line of INSCERCO MFG. INC.

4621 West 138th Street
 Crestwood II. 60445
 Phone: 708-597-8777
 Fax: 708-597-2176
 Website: www.inscerco.com
 Email: inscerco@inscerco.com

YOUR AREA REPRESENTATIVE IS:

